


CONCRETE PIPES

SPIGOT AND SOCKET NON-PRESSURE PIPES (S&S)

Eldocrete Spigot and Socket Pipes can only be used for storm water drainage and are sealed using a sliding rubber ring. The sliding rubber ring is installed using a soft soap lubricant.

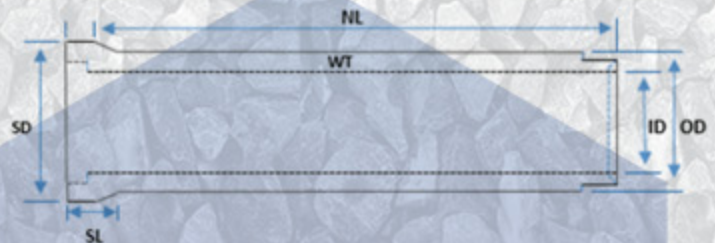

As per SANS 677:2020

SPIGOT & SOCKET CLASS 50D / 100D – SANS 677 TYPE SC								
Class	Nominal Diameter	Inside Diameter	Outside Diameter	Wall Thickness	Socket Diameter	Socket Length	Nominal Length	Unit Mass
	ND mm	ID mm	OD mm	WT mm	SD mm	SL mm	NL m	kg
100D / 50D	300	295	370	37.5	455	265	2.5	320
	375	360	430	35	530	245	2.5	360
	450	450	540	45	660	250	2.4	510
	525	520	620	50	745	255	2.4	630
	600	595	710	57.5	840	270	2.5	875
	675	670	790	60	925	275	2.5	1045
	750	740	860	60	1025	315	2.5	1256
	825	820	970	75	1135	335	2.5	1530
	900	880	1060	90	1235	365	2.5	1970
	1050	1020	1225	102.5	1425	400	2.5	2790
	1200	1170	1400	115	1590	410	2.5	3450

**Key for drawing: ND – Nominal Diameter, ID – Inside Diameter, OD – Outside Diameter, NL – Nominal Length, WT – Wall Thickness, SD – Socket Diameter, SL – Socket Length.*

**Please Note: Mass per unit is an approximation only.*

Measurements are variable due to tolerances